

# hi-lift 1L & 2L

PART NO. 1L: FP2099, 2L: FP2071

GB

## DESCRIPTION

Designed to collect condensate water from refrigeration and air conditioning units. Operating automatically when the float rises they discharge to a head of 12m.

The Hi-lift will pump a smaller volume of water than the Hi-flow, but to a greater head.

## IN THE BOX

- 1 x Hi-Lift 1L or 2L

## SPECIFICATIONS

- Pump rating: 230V AC, 25W
- 1PH 50 Hz 0.25A
- Volt-free alarm wires, N.C. contacts rated @ 3A at 230V
- Tank capacity: 1L or 2L
- Connecting cable: 2m
- Auto-resetting thermal cut-out, shaded pole motor
- In-line valve prevents back filling
- Incorporated back-plate for vertical mounting
- Maximum water temperature: 40°C
- 3 inlet positions: 25mm  $\varnothing$
- Outlet size: 6mm
- Pumps water, fibrously contaminated water and air
- Continuously rated
- Class I appliance

### Hi-Lift 1L:


- 132mm (h) x 235mm (w) x 140mm (d)
- Weight: 1.8kg

### Hi-Lift 2L:

- 165mm (h) x 235mm (w) x 140mm (d)
- Weight: 2kg

## PERFORMANCE

- Water flow rate: 11L/hr at 12m head
- Maximum recommended head: 12m
- Horizontal: In excess of 100m

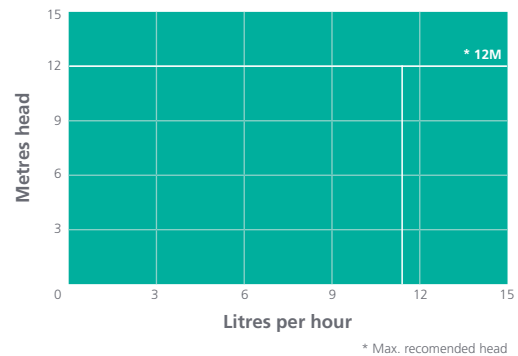

## ELECTRICAL CONNECTIONS:

|              |   |               |
|--------------|---|---------------|
| BROWN        | : | LIVE          |
| BLUE         | : | NEUTRAL       |
| GREEN/YELLOW | : | EARTH         |
| 2 X BLACK    | : | SAFETY SWITCH |