

mini FLOWWATCH® 2 COMFORT


siccom

The best mini pump on the market in a quieter and easy-to-install version, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCD750



NEW

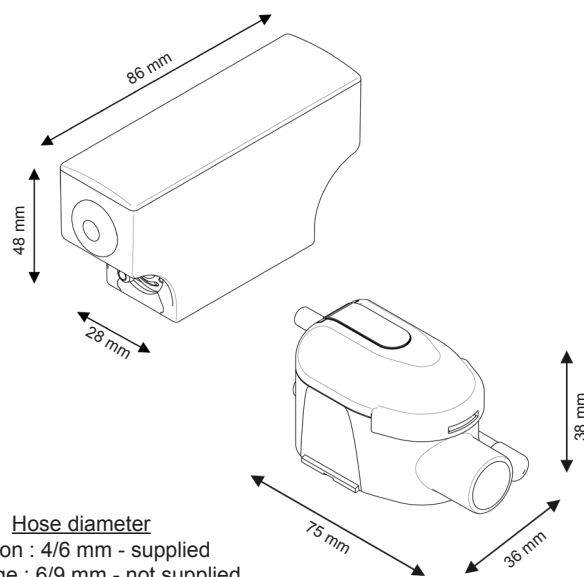


SPECIFICATIONS

Flowrate max	15 l/h
Suction head max	2 m
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IP64
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.6 m
Dimensions	86 x 28 x 48 mm / 75 x 38 x 36 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.

FLOWRATE

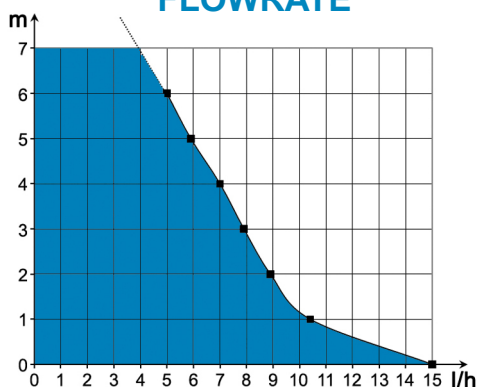

CONTENTS

Pump - Reservoir with air-vent tube - Power / alarm cable - Comfort casing - Pump stand - Reservoir stand - Stop Siphoning - Double-sided adhesive - Inlet tube - Suction tube 1.8m - 4 clamps

BENEFITS

New casing Comfort

The new Comfort casing is composed of a custom-made patented foam.

It dampens pump vibrations and reduces the perceived noise level.

Reliability proven

The mini FLOWWATCH® 2, included, is a reliable and durable pump sold in more than 35 countries.

Very silent



Thanks to its casing, the pump is extremely quiet and suitable for installation in any room.

Pump stand included



Make pump installation and maintenance easier.

Stop siphoning included



Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

Quick connectors



Make installation and maintenance easier.



IP64 protection

Protected against water splashes and dust.