

mini FLOWWATCH® 3 WiFi DESIGN

SICCOM

WiFi connected pump in duct version, ready to install, for the condensate removal from air conditioners up to 10kW / 36000BTU.

Ref: DE05WFCD760



All the benefits of the
mini FLOWWATCH® 3 WiFi
in a trunking version



BENEFITS



Web interface

The interface is accessible from a computer, smartphone, or tablet and requires no software or application installation.



Email sending in case of alarm

Be notified immediately in the event of a malfunction (3 alarm cases).

SPECIFICATIONS

Flowrate max	15 l/h
Discharge head	10 m
Electrical power	21W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.6 m
Trunking dimensions	80 x 55 x 800 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.



Real time supervision

Access a wealth of information about your pump fleet in just a few clicks.



Pump interconnection

Create a network of pumps, and allow them to communicate with each other for more productive management of your pump fleet.



Extremely silent


The quietest pump of our range (18.6 dBA), for an installation in any room.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

FLOWRATE

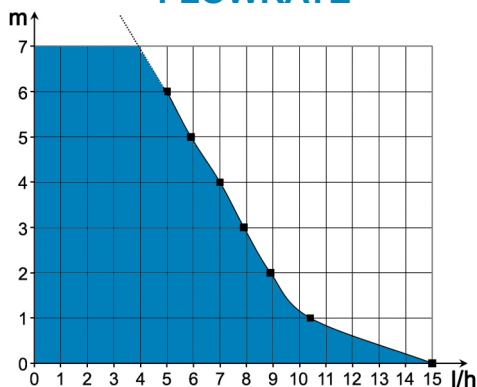

Kit pre-assembled

Pump is already installed in its duct. Installation is easy and quick.

CONTENTS



Duct with elbow- Finishing gasket - Finishing ceiling plate - Pump - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Inlet tube - Suction tube 0.25m - Screws and rawlplugs