

# mini FLOWWATCH® 3 WiFi

As a real product of predictive maintenance, the mini FLOWWATCH® 3 WiFi allows to remotely supervise a fleet of pumps and to anticipate a maintenance on a pump or an air conditioner. For air conditioners up to 10kW / 36000BTU.

Ref: DE05WFCC760




The first  
condensate pump  
WiFi connected




Hose diameter  
Suction : 4/6 mm - supplied  
Discharge : 6/9 mm - not supplied


Monitor your **pump fleet** in the blink of an eye!

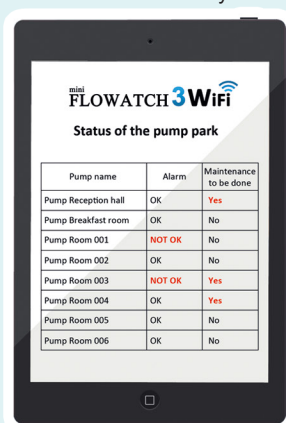

View all pump datas

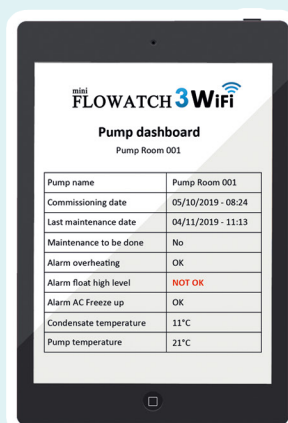

The pump sends you an email when an alarm triggers!

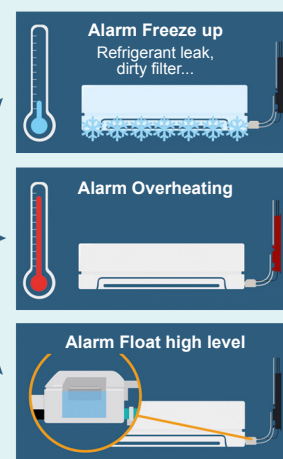


## SPECIFICATIONS

Flowrate max	15 l/h
Suction head max	2 m
Discharge head	10 m
Electrical power	21W
Voltage	220-240V 50/60Hz
Alarm	NC
Noise level*	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.6 m
Dimensions	272 x 35 x 43 mm / 75 x 38 x 36 mm

\* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

\*\* The pump is able to run 100% of the time if necessary.

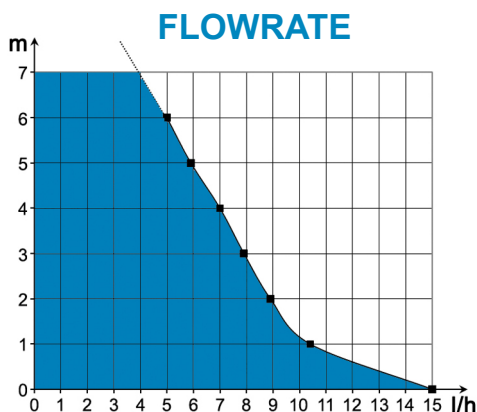

## BENEFITS



### Web interface

The interface is accessible from a computer, smartphone, or tablet and requires no software or application installation.



### Email sending in case of alarm

Be notified immediately in the event of a malfunction (3 alarm cases).



### Real-time supervision

Access a wealth of information about your pump fleet in just a few clicks.



### Pump interconnection

Create a network of pumps, and allow them to communicate with each other for more productive management of your pump fleet.



### Extremely silent

The quietest pump of our range (18.6 dBA), for an installation in any room.



### Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

## CONTENTS

Pump - Reservoir with air-vent tube - Reservoir stand - Double-side adhesives - Inlet tube - Suction tube 1.8m - Clamps