

# SB 550

**Scotsman**  
Ice Systems

Bin  
up to 252 kg

Item #:

Project:

Quantity:



## FEATURES

- Slope front ice storage bin, for Gourmet & Dice Cubes, Flake, Super-flake, Nugget, Cubelet ice.
- New sleek, contemporary styling.
- Convenient and hygienic internal ice scoop holder.
- Exterior panels in durable stainless steel.
- Polyurethane Insulation.
- High density, non-corroding Polyethylene bin liner, designed with easy-to-clean rounded corners, resistant to scratches and scuffs from ice scoops.
- Robust door frame will resist operational abuse.
- Rounded door-lip profile allows an easy reach for enhanced ease of operation.

## UNIT DATA

Size (W x D x H) 1082 x 824 x 968 mm

Net weight 48 kg

## SHIPPING DATA

Carton (W x D x H) 1140 x 910 x 960 mm

Weight 63 kg

| Bin    | Compatibility | Ice Machine             |
|--------|---------------|-------------------------|
| SB 550 | BINTOPMXGSB55 | MXG 428-437-438-638-938 |
|        | CBT42EMCD     | MV 456-460-606-806-1006 |
|        | CBT42EFSD     | N 622-922               |
|        | CBT42EFSD     | MFN 46-56               |
|        | CBT42EFSD     | MF 26-36-46-47-56-58-59 |

## LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

Certifications:



## IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**

Apple store

Google play

Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)

[www.scotsman-ice.com](http://www.scotsman-ice.com)

Bin up to 252 kg

# SB 550

**Scotsman**  
Ice Systems


Bin  
up to 252 kg

Item #:


Project:

Quantity:

Bin up to 252 kg

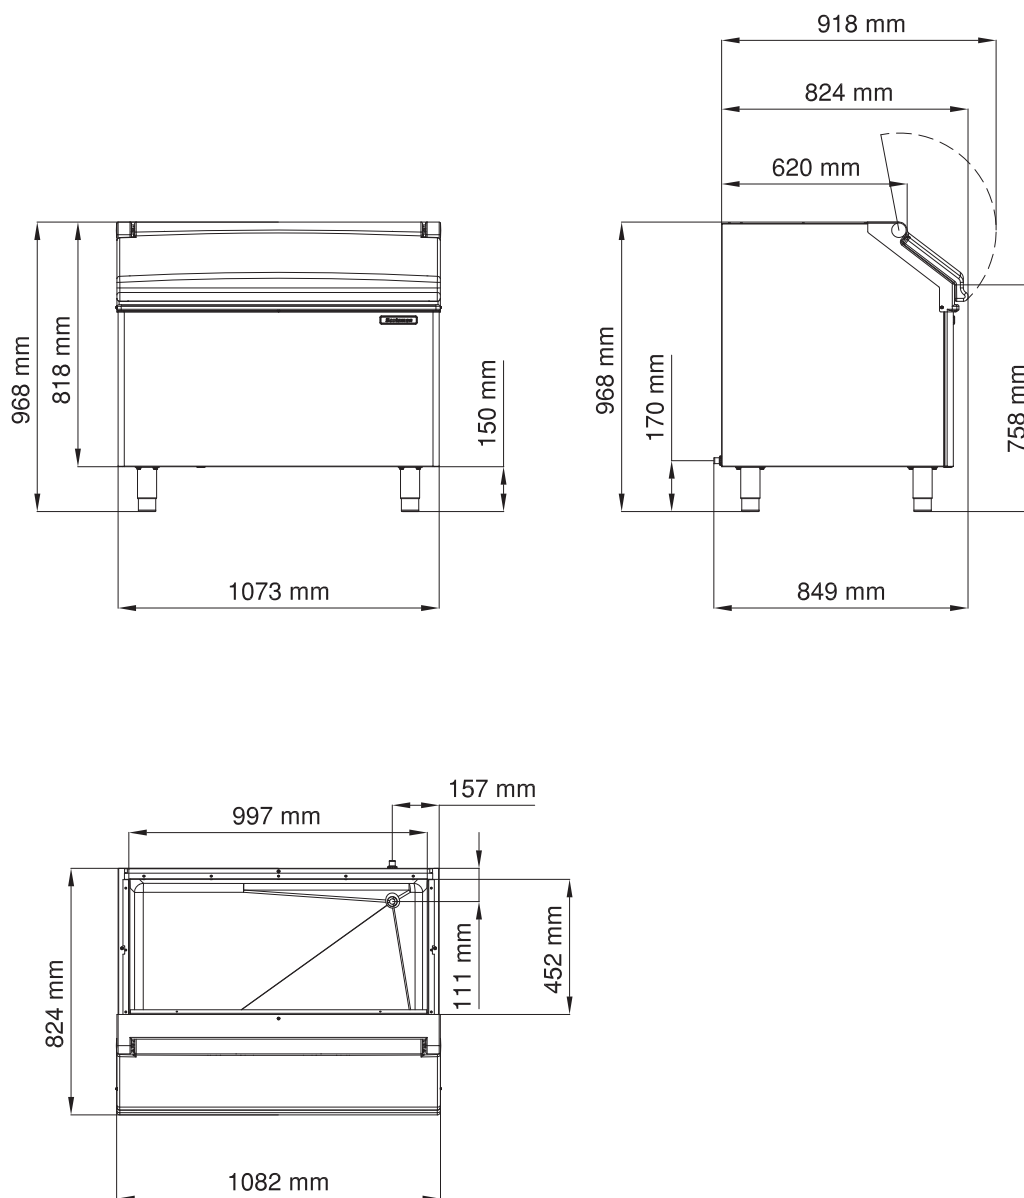

| Ice capacity<br>(application)* | Ice capacity<br>(AHRI)** | Internal volume |
|--------------------------------|--------------------------|-----------------|
| kg                             | kg                       | m <sup>3</sup>  |
| 252                            | 197                      | 0.513           |



(\*) Application capacity is calculated on 90% of total volume x 545 kg/m<sup>3</sup>



(\*\*) AHRI capacity is calculated on 80% of total volume x 481 kg/m<sup>3</sup>