cotsman

Self Contained Ice Machine up to 130 kg

Item #:
Project:
Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine maintenance visible alarm light on front pane
- Ergonomically designed ice-storage access, with disappearing door. Door-closing movement dampening system.
- Vapor-based microbial control system pouch in ice-storage area.



AC L 206 Large Gourmet 39 g Ø 38 x H 41 mm



AC M 206 Medium Gourmet 20 g Ø 30 x H 34 mm



AC S 206 Small Gourmet 8 g Ø 21 x H 25 mm

CONDENSING SYSTEM	INTERNAL BIN CAPACITY					
Air cooled Water cooled		50 kg				
REFRIGERANT GAS		OPERATING REQUIREMENTS				
R404A		Minimum	Maximum			
	Air temperature	10°C	43°C			
VOLTAGE V/Hz/ph	Water temperature	5°C	38°C			
230/50/1	Water pressure	1 bar (14 psi)	5 bar (70 psi)			
230/60/1	Electrical voltage	-10%	+10%			

Certifications:
















AC 206

Scotsman° Ice Systems

Self Contained Ice Machine up to 130 kg

Item #:
Project:
Quantity:

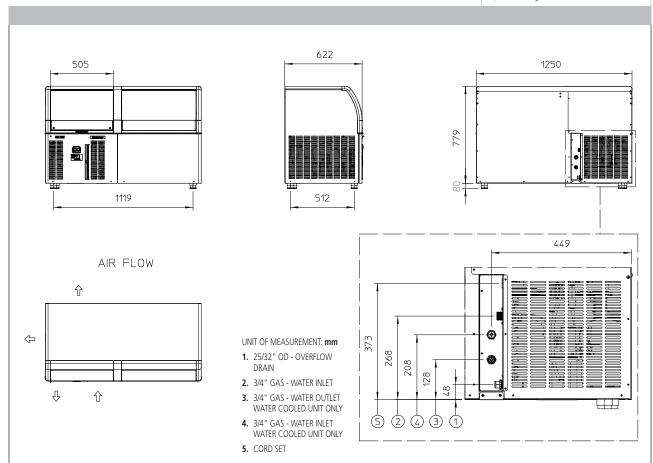

				Compressor		Circuit wires		Max. fuse size	
UNIT DATA		Version	Voltage	Btu/h	w	No.	Ømm²	Α	
Size (W x D x H)	1250 x 622 x 859 mm	AC L 206 AS	230/50/1	7165	2100	3	1.5	16	
Net weight	82 kg	AC L 206 WS	230/50/1	7165	2100	3	1.5	16	
		AC M 206 AS	230/50/1	6039	1770	3	1.5	16	
SHIPPING DATA		AC M 206 WS	230/50/1	6039	1770	3	1.5	16	
Carton (W x D x H)	1320 x 690 x 960 mm	AC S 206 AS	230/50/1	7165	2100	3	1.5	16	
Weight	95 kg	AC S 206 WS	230/50/1	7165	2100	3	1.5	16	
		AC M 206 AS	230/60/1	6995	2050	3	1.5	16	

			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
AC L 206 AS	Air	230/50/1	126	117	92	21.6	20.5	9.6	950
AC L 206 WS	Water	230/50/1	126	124	112	15.4	17.2	115.8	700
AC M 206 AS	Air	230/50/1	130	123	91	19.9	18.1	10.8	850
AC M 206 WS	Water	230/50/1	128	126	108	14.9	16.1	81.3	760
AC S 206 AS	Air	230/50/1	100	93	72	29.8	21.3	7.5	950
AC S 206 WS	Water	230/50/1	100	93	72	29.8	21.3	81.3	950
AC M 206 AS	Air	230/60/1	130	123	91	24.0	21.8	12.5	1050

^(*) Data refer to 32°C Amb. / 21°C Water temperature conditions