

EFC 134 EASY FIT

Self Contained Ice Machine up to 130 kg

Item #:
Project:
Quantity:



FEATURES

- Produces “Cubelet” ice (compressed ice flakes).
- Reliable electronic controls. Resistant stainless steel exterior.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Routine Maintenance visible alarm light on front panel.
- Ergonomically designed ice-storage access, with disappearing door.
- Door-closing movement dampening system.



EFC 134 EASY FIT
Cubelet 1 g
W 16 x D 15 x H 7-8 mm

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

40 kg

REFRIGERANT GAS

R404A

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine up to 130 kg

EFC 134 EASY FIT

Self Contained Ice Machine up to 130 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 130 kg

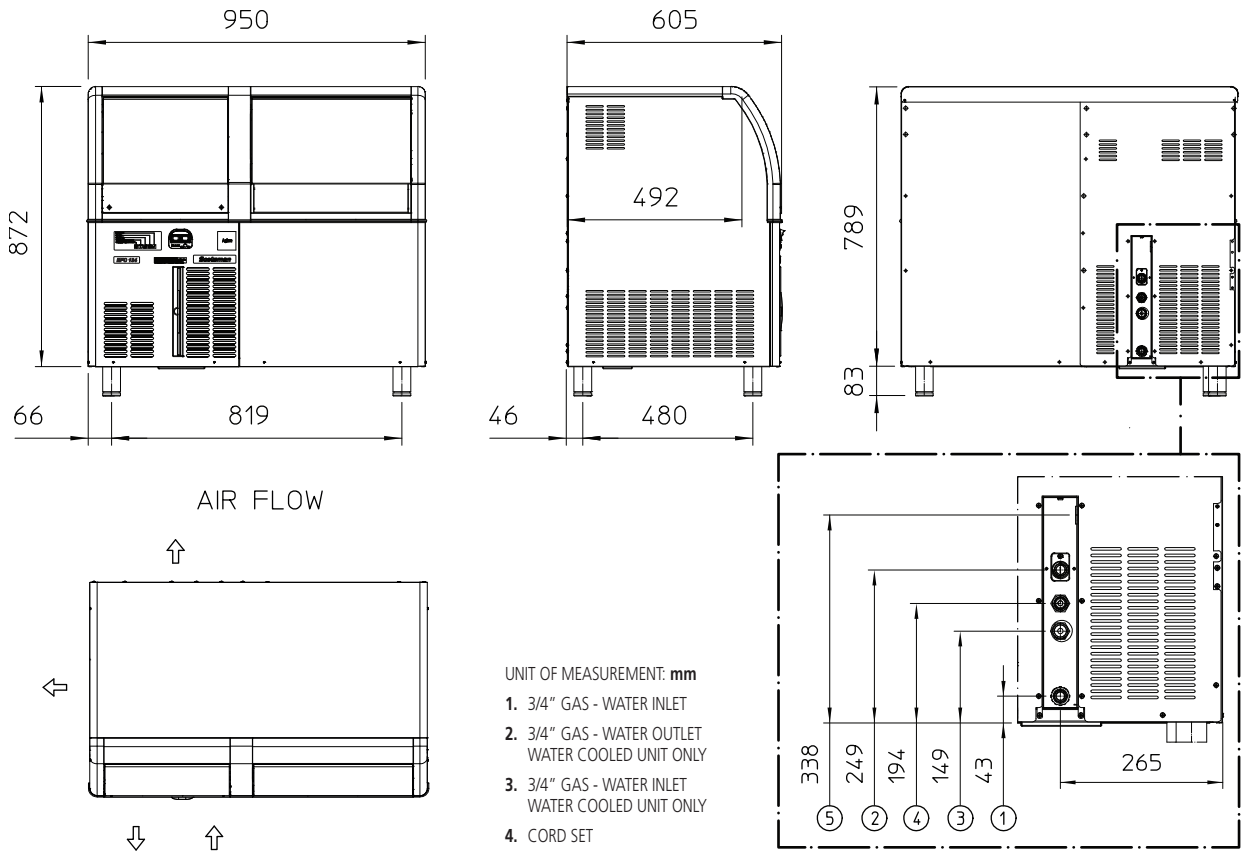

UNIT DATA			Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	950 x 605 x 872 mm		EFC 134 AS	230/50/1	4606	1350	3	1.5	10
Net weight	70 kg		EFC 134 WS	230/50/1	4606	1350	3	1.5	10
			EFC 134 AS	230/60/1	4606	1350	3	1.5	10
SHIPPING DATA									
Carton (W x D x H)	1030 x 680 x 960 mm								
Weight	81 kg								
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
EFC 134 AS	Air	230/50/1	130	127	92	14.9	13.7	3.8	600
EFC 134 WS	Water	230/50/1	130	124	110	11.0	12.2	59.4	500
EFC 134 AS	Air	230/60/1	130	127	92	14.9	13.7	3.8	600

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions