

Self Contained Ice Machine up to 25 kg

Item #:

Project:

Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.



EC M 47
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled

INTERNAL BIN CAPACITY

9 kg

REFRIGERANT GAS

R290

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com





Self Contained Ice Machine up to 25 kg

Self Contained Ice Machine up to 25 kg

Item #:


Project:

Quantity:

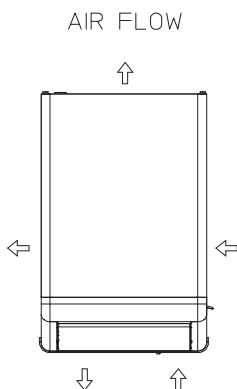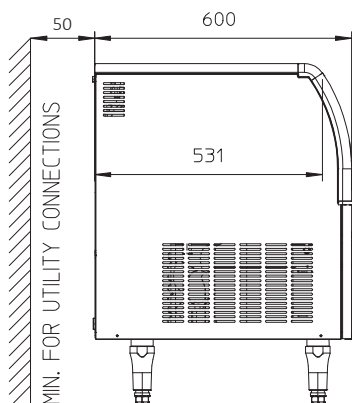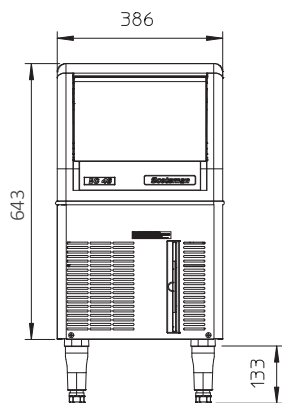

UNIT OF MEASUREMENT: mm

1. 12/16" OD - WATER OUTLET
2. 3/4" GAS - WATER INLET
3. 3/4" GAS - WATER OUTLET
WATER COOLED UNIT ONLY
4. 3/4" GAS - WATER INLET
WATER COOLED UNIT ONLY
5. CORD SET

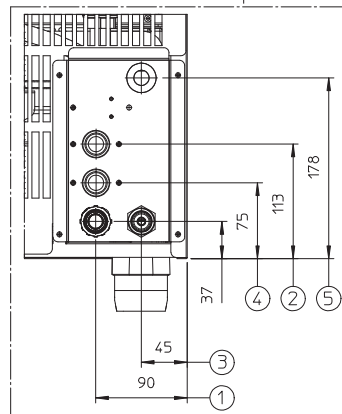

UNIT DATA

Size (W x D x H) 386 x 600 x 645 mm
Net weight 35 kg

SHIPPING DATA

Carton (W x D x H) 460 x 670 x 760 mm
Weight 42 kg

		Compressor		Circuit wires		Max. fuse size
Version	Voltage	Btu/h	W	No.	Ømm²	A
EC M 47 AS	230/50/1	2102	616	3	1.0	10

			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
EC M 47 AS	Air	230/50/1	25	24	18	32.2	5.8	4.0	320

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions