

Verso R 2000 F

Nominal air flow, m ³ /h	2150
Panel thickness, mm	50
Unit weight, kg	280
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	16,8
Maximal operating current HW, A	6,3
Filters dimensions BxHxL, mm	560x420x96
Electric power input of the fan drive at maximum flow rate, W	580
Electric air heater capacity, kW / Δt, °C	7,5/9,7
Control panel	C5.1
Maintenance space, mm	400



The photo is intended for informational purposes only, exact details may vary.

Acoustic data

A-weighted sound power level L_{wa}, dB(A) at nominal flow rate

Supply inlet	69
Supply outlet	79
Exhaust inlet	69
Exhaust outlet	79
Casing	60


A-weighted sound pressure level L_{pa}, dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	49
--------------	----

Performance

Supply air filter F7, exhaust air filter M5 Air flow rate (m³/s)

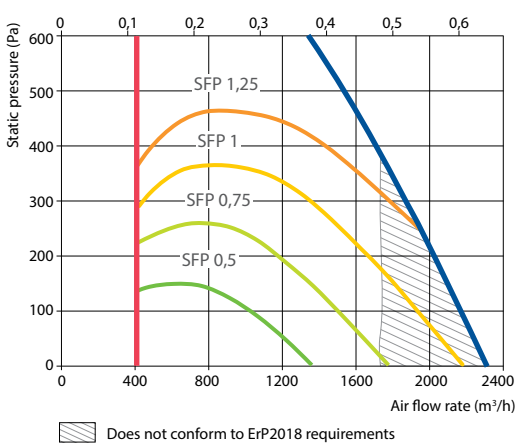

Temperature efficiency

Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	15,8	16,9	17,6	18,3	18,9	22,4	23,1	23,8


indoor +22°C, 10% RH

Hot water duct air heater (DH)*


Water temperature in/out, °C	Winter		
	80/60	70/50	60/40
Capacity, kW	4,2	4,2	4,2
Flow rate, dm ³ /h	185	184	183
Pressure drop, kPa	9,1	9,1	9,2
Temperature in/out, °C	15,8/22		
Maximal capacity, kW	16,50	13,3	10,0
Connection, "	½		

* option

Shown as right (R1)

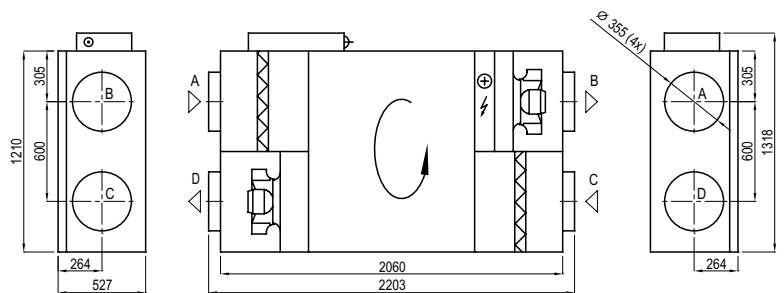

Shown as left (L1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air

Accessories (p. 108)

Closing damper	AGUJ-M-355+LF24/LM24
Silencer	A/D AGS-355-100-900-M
	B/C AGS-355-100-1200-M
Water heater	DH-355
PPU	PPU-HW-3R-15-1-W2
Air heater-cooler	DCW-2,0-13/ DHCW-355
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-2,0-14
Cooling unit	MOU-48HFN6-KA8243