

Verso CF 1500 F

Nominal air flow, m ³ /h	1600
Panel thickness, mm	50
Unit weight, kg	190
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	12,9
Maximal operating current HW, A	6,7
Filters dimensions BxHxL, mm	550x420x46-M5
Electric power input of the fan drive at maximum flow rate, W	420
Electric air heater capacity, kW / Δt, °C	4,5/7,8
Control panel	C5.1
Maintenance space, mm	400



The photo is intended for informational purposes only, exact details may vary.

Acoustic data

A-weighted sound power level L_{WA} , dB(A) at nominal flow rate

Supply inlet	62
Supply outlet	76
Exhaust inlet	61
Exhaust outlet	76
Casing	58

A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	48
--------------	----

Temperature efficiency

Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	15,0	15,6	16,2	17,0	17,8	22,7	23,9	25,1

indoor +22°C, 10% RH


Hot water duct air heater (DH)*

Water temperature in/out, °C	Winter		
	80/60	70/50	60/40
Capacity, kW	3,8	3,8	3,8
Flow rate, dm ³ /h	165	165	164
Pressure drop, kPa	7,3	7,3	7,4
Temperature in/out, °C	15,0/22		
Maximal capacity, kW	13,5	10,8	8,2
Connection, "	½		


* option

Performance

Supply air filter F7, exhaust air filter M5

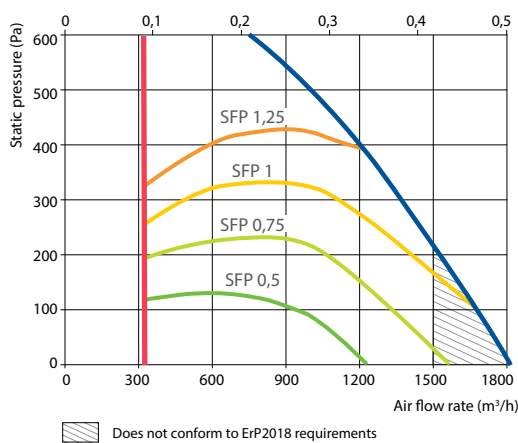


Shown as right (R1)

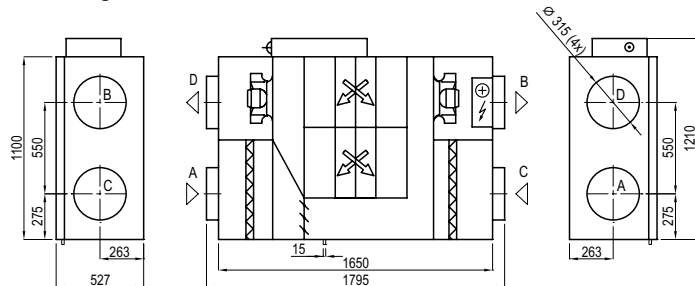

Accessories (p. 108)

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M
	B/C AGS-315-100-1200-M
Water heater	DH-315
PPU	PPU-HW-3R-15-1-W2
Air heater-cooler	DCW-1,6-11/DHCW-315
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-1,6-11
Cooling unit	MOU-36HFN6-KA8243

Shown as left (L1)



- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air