


Verso S 1300 F

Nominal air flow, m ³ /h	1300
Panel thickness, mm	50
Unit weight, kg	46
Filters dimensions B×H×L, mm	558×287×46-M5
Electric power input of the fan drive at reference flow rate, W	350
Control panel	C5.1
Maintenance space, mm	400

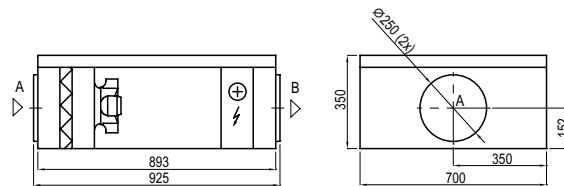

The photo is intended for informational purposes only, exact details may vary.

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	74
Supply outlet	80
Casing	56


A-weighted sound pressure level L_{pA} , dB(A)
10 m² normally isolated room, distance from casing – 3 m.

Surroundings	46
--------------	----

Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT , °C
Verso S 1300 F-HE/9	3~400	9,0	15,7	19,2
Verso S 1300 F-HE/15	3~400	15,0	24,4	32,1
Verso S 1300 F-HW	1~230	–	2,9	–

Performance

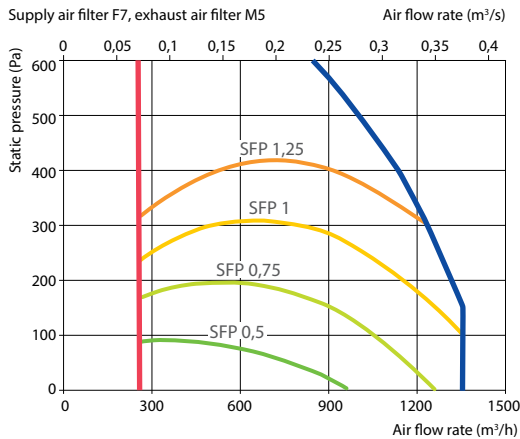

* Compliance to ErP2018 requirements check with the selection program.

Hot water air heater

Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	10,1	8,4	6,5
Flow rate, dm ³ /h	448	369	286
Pressure drop, kPa	3,3	2,8	2,3
Temperature in/out, °C	-5 / 18,2	-5 / 14,2	-5,0 / 10,0
Maximal capacity, kW	10,1	8,4	6,5
Connection, "		1/2	

Accessories (p. 108)

Closing damper	AGUJ-M-250+LF24/LM24
Silencer	A AGS-250-50-600-M
	B AGS-250-50-900-M
PPU	PPU-HW-3R-15-2.5-W2
Air heater-cooler	DCW-1,4-9
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-1,4-10
Cooling unit	MOU-36HFN6-KA8243