


# Verso S 2100 F

Nominal air flow, m <sup>3</sup> /h	1900
Panel thickness, mm	50
Unit weight, kg	73
Filters dimensions BxHxL, mm	858x287x46-M5
Electric power input of the fan drive at reference flow rate, W	340
Control panel	C5.1
Maintenance space, mm	400



The photo is intended for informational purposes only, exact details may vary.

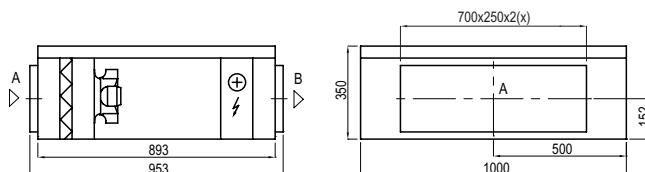

### Acoustic data

#### A-weighted sound power level L<sub>wa</sub>, dB(A) at nominal flow rate

Supply inlet	70
Supply outlet	75
Casing	52

#### A-weighted sound pressure level L<sub>pa</sub>, dB(A)


10 m<sup>2</sup> normally isolated room, distance from casing – 3 m.

Surroundings	42
--------------	----

### Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT, °C
Verso S 2100 F-HE/15	3~400	15,0	24,7	21,9
Verso S 2100 F-HE/22,5	3~400	22,5	35,6	32,9
Verso S 2100 F-HW	1~230	–	3,3	–

### Performance

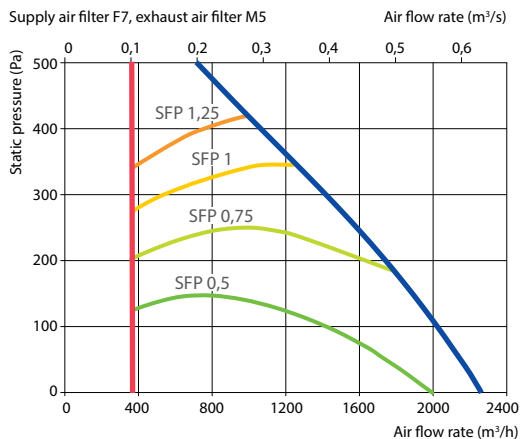

\* Compliance to ErP2018 requirements check with the selection program.

### Hot water air heater

Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	17,0	14,4	11,7
Flow rate, dm <sup>3</sup> /h	752	632	511
Pressure drop, kPa	7,5	5,9	4,5
Temperature in/out, °C	-5,0/21,7	-5,0/17,5	-5,0/13,3
Maximal capacity, kW	17,0	14,4	11,7
Connection, "		½	

### Accessories (p. 108)

Closing damper	SRU-M-700x250+LF24/LM24
Silencer	A STS-IVR3BA-800-250-700-S
	B STS-IVR3BA-800-250-1250-S
PPU	PPU-HW-3R-15-2.5-W2
Air heater-cooler	DCW-2,0-13
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-2,0-14
Cooling unit	MOU-48HFN6-KA8243